



Magic Magnetic Track Light Series

Modern | Fashion | Sleek | Lighting Design

AN AURA OF EXCLUSIVITY



ABOUT US



About Us...

Designed by world class international lighting designers, ORLO energy efficient LED lighting solutions are a leap ahead of the market. Our aim at ORLO is to maintain a competitive advantage by innovating and bringing the best in-class technology and latest designs to our target market.

Today ORLO is one of the fastest growing consumer durable brands in India. Registered under ORLO Electronics Pvt Ltd, ORLO has been at the forefront of transforming the electrical & lighting industry in India through innovation and industry best pre-post sale services, warranty and support.

ORLO signifies quality, consistency and innovation. ORLO LED Lighting solutions come with industry leading on-site replacement warranty*.

Note: Please allow 3-7 days for assembly/packing of all material in project lighting catalogue.

*On-site Replacement is only provided directly by the company in Delhi/NCR and by authorised distributors & dealers in rest of India..



ORLO BIS Certificate






ORLO ISO Certificate

Our Clients...



Products Index

SN.	PRODUCTS	PAGE NO.
1	SMD Linear light	05-06
2	COB Grill Light	07
3	Adjustable COB Grill	08
4	Spot Track light	09-10
5	Pendant Light	12
6	Round Adjustable Grill	13
7	Round Adjustable Spot Tracklight	14
8	SQ. Adjustable COB Grill	15-16
9	Drivers & Accessories	17-19

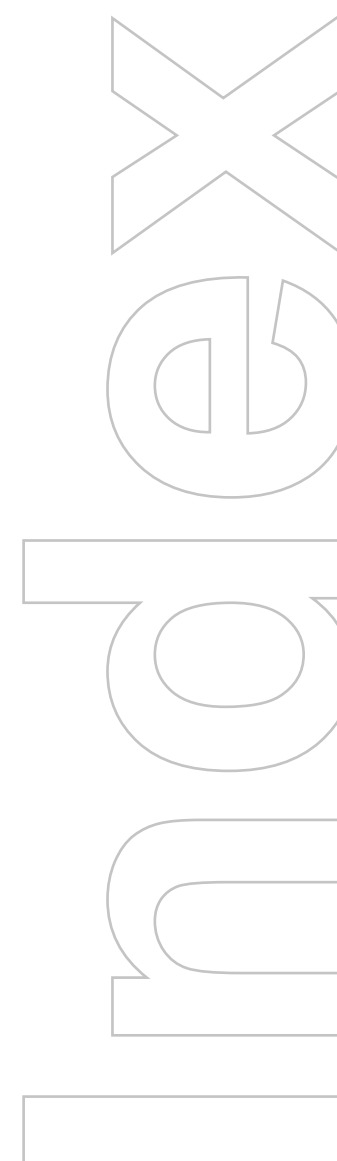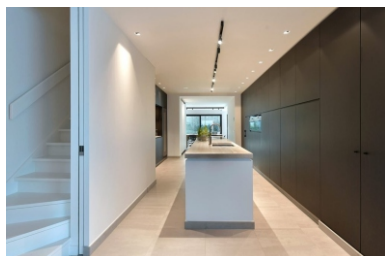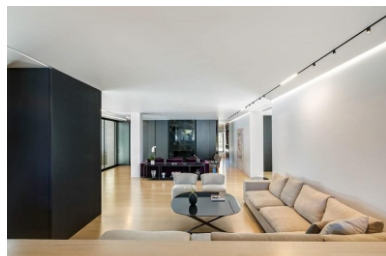

AN AURA OF EXCLUSIVITY




ORLO®
THE NEW ESSENTIALS

One Second installation

Anywhere in the track, various products can be placed, such as spot light, linear light and pendant lights

LED MAGNETIC TRACK LIGHTS

SMD Linear Track Light

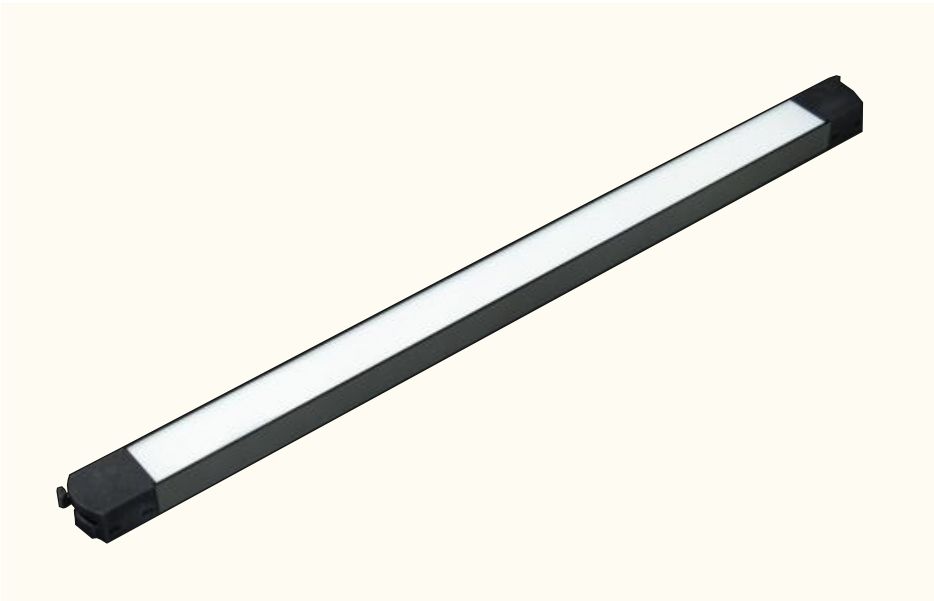

12W Technical Specification


CAT NO.	OMM-109 SMART LIGHT CAT NO. : OMM-171
LED POWER	12 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	270X22X17
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

18W Technical Specification


CAT NO.	OMM-110 SMART LIGHT CAT NO. : OMM-172
LED POWER	18 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	350X22X17
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

24W Technical Specification

CAT NO.	OMM-111 SMART LIGHT CAT NO. : OMM-173
LED POWER	24 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	450X22X17
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

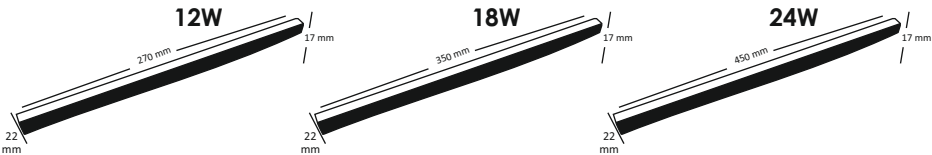

APPLICATIONS



*All sizes are in mm




THE NEW ESSENTIALS

SMD Linear Track Light




32W Technical Specification

CAT NO.	OMM-112 SMART LIGHT CAT NO. : OMM-174
LED POWER	32 WATT
VOLTAGE	AC 220-240V
SIZE (LXWXH)	600X22X17
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90





APPLICATIONS



*All sizes are in mm

COB Grille Light

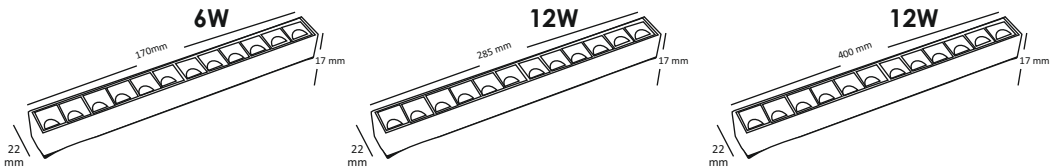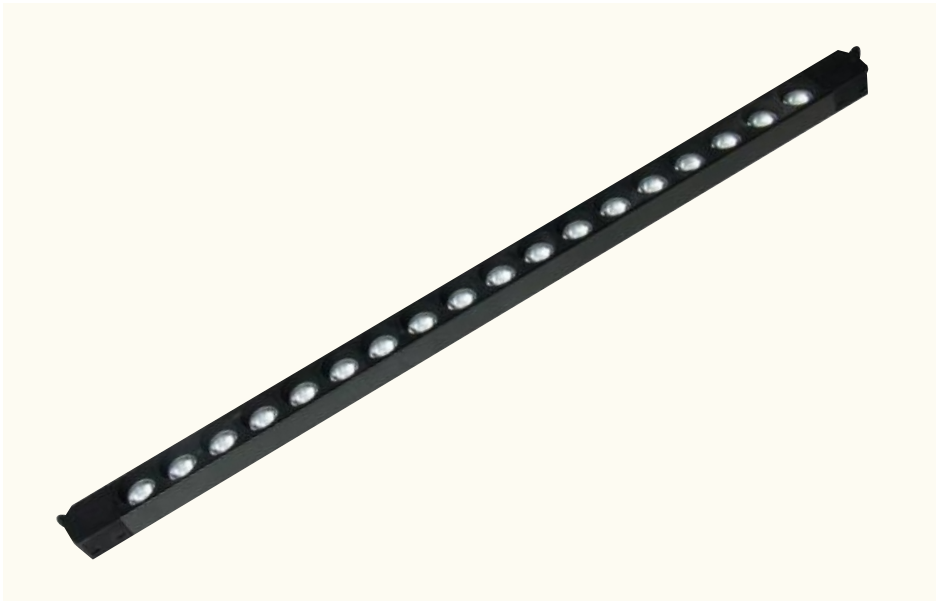

APPLICATIONS



*All sizes are in mm

6W Technical Specification

CAT NO.	SMART LIGHT CAT NO. : OMM-175
LED POWER	6 WATT
VOLTAGE	AC 100-24V
SIZE (LXWXH)	170X22X17
BEAM ANGLE	120°
CCT	FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

12W Technical Specification


CAT NO.	OMM-113 SMART LIGHT CAT NO. : OMM-176
LED POWER	12 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	285X22X17
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

18W Technical Specification


CAT NO.	OMM-114 SMART LIGHT CAT NO. : OMM-177
LED POWER	18 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	400X22X17
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90



Adjustable COB Grille Light

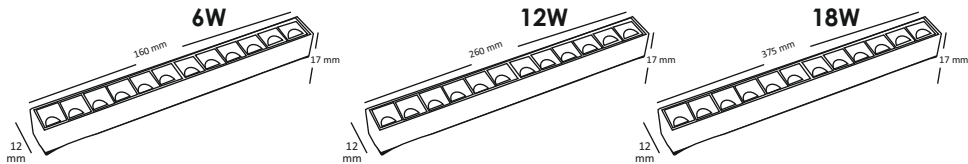

APPLICATIONS



6W Technical Specication

CAT NO.	OMM- 115 SMART LIGHT CAT NO. : OMM-178
LED POWER	6 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	260X27X45
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

12W Technical Specication


CAT NO.	OMM- 115 SMART LIGHT CAT NO. : OMM-179
LED POWER	12 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	260X27X45
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

18W Technical Specication


CAT NO.	OMM-116 SMART LIGHT CAT NO. : OMM-180
LED POWER	18 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	375X27X45
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

*All sizes are in mm


Spot Track Light



6W




12W



18W

APPLICATIONS



*All sizes are in mm

6W Technical Specification

CAT NO.	OMM-117 SMART LIGHT CAT NO. : OMM-181
LED POWER	6 WATT
VOLTAGE	AC 100-240
SIZE (LxOD)	85x40
BEAM ANGLE	35°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

12W Technical Specification

CAT NO.	OMM-118 SMART LIGHT CAT NO. : OMM-182
LED POWER	12 WATT
VOLTAGE	AC 100-240V
SIZE (LxOD)	95x50
BEAM ANGLE	40°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

18W Technical Specification

CAT NO.	OMM-119 SMART LIGHT CAT NO. : OMM-183
LED POWER	18 WATT
VOLTAGE	AC 100-240V
SIZE (LxOD)	115x60
BEAM ANGLE	45°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90


THE NEW ESSENTIALS

Spot Track Light



30W Technical Specification

CAT NO.	OMM-120
LED POWER	30 WATT
VOLTAGE	AC 100-240V
SIZE (LxOD)	147 X 78 mm
BEAM ANGLE	55°
CCT	3000K 4000K
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90



*All sizes are in mm

APPLICATIONS



Offices



Hotels and
Restaurants



Residences



Auditorium



Retail



Hospitals

AN AURA OF EXCLUSIVITY

Perfume

Eau de Parfum

de Toilette


THE NEW ESSENTIALS

Pendant Hanging Light



10W Technical Specification


CAT NO.	SMART LIGHT CAT NO. : OMM-184
LED POWER	10 WATT
VOLTAGE	AC 100-240V
SIZE (LxOD)	300x40
BEAM ANGLE	35°
CCT	FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90



10W

15W Technical Specification


CAT NO.	SMART LIGHT CAT NO. : OMM-185
LED POWER	15 WATT
VOLTAGE	AC 100-240V
SIZE (LxOD)	300x50
BEAM ANGLE	120°
CCT	FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90



15W

15W Technical Specification


CAT NO.	OMM-121
LED POWER	15 WATT
VOLTAGE	AC 100-240V
SIZE (LxOD)	300x40
BEAM ANGLE	120°
CCT	3000K 4000K
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90



15W

*All sizes are in mm

APPLICATIONS




THE NEW ESSENTIALS

Round Adjustable
Grill Spot Light



15W Technical Specification

CAT NO.	OMM-122 SMART LIGHT CAT NO. : OMM-188
LED POWER	15 WATT
VOLTAGE	AC 100-240V
SIZE	95
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90



*All sizes are in mm

APPLICATIONS




THE NEW ESSENTIALS

Round Adjustable Spot Light



15W Technical Specification

CAT NO.	OMM-123 SMART LIGHT CAT NO. : OMM-189
LED POWER	15 WATT
VOLTAGE	AC 100-240V
SIZE (LXWXH)	95
BEAM ANGLE	120°
CCT	3000K, 4000K FOR SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90



*All sizes are in mm

APPLICATIONS




THE NEW ESSENTIALS

SQ. Adjustable Smart Grille
Spot Light



15W Technical Specification

CAT NO.	SMART LIGHT CAT NO. : OMM-186
LED POWER	15 WATT
VOLTAGE	AC 100-240V
SIZE (LXW)	75x75
BEAM ANGLE	120°
CCT	SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

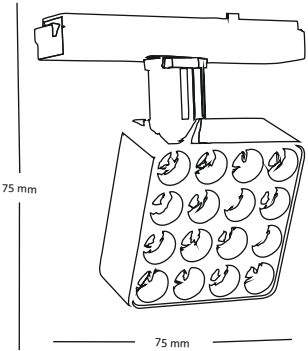

*All sizes are in mm

APPLICATIONS




THE NEW ESSENTIALS

SQ. Adjustable Smart Grille Spot Light




15W Technical Specication

CAT NO.	SMART LIGHT CAT NO. : OMM-187
LED POWER	24 WATT
VOLTAGE	AC 100-240V
SIZE (LXW)	220x40
BEAM ANGLE	120°
CCT	SMART LIGHT CCT: 3CCT CHANGING
LUMENS	80L/W
CRI	>80
POWER FACTOR	>0.90

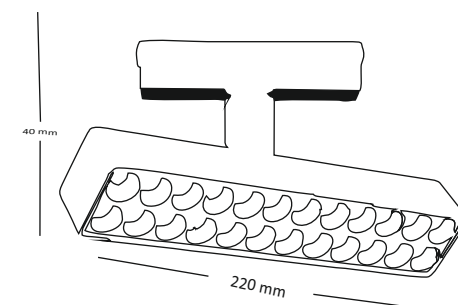

*All sizes are in mm

APPLICATIONS



DRIVERS & ACCESSORIES



CAT NO.: OMM-101
Super Slim Surface Mount Track
5mm-1Mtr.
Size: 5.5mmx1m



CAT NO.: OMM-102
Super Slim Surface Mount Track
5mm-2Mtr.
Size: 5.5mmx2m



CAT NO.: OMM-103
Back light Super Slim Surface
Mount Track
14mm-1Mtr. Without Strip
Size: 14mmx1m



CAT NO.: OMM-104
Back light Super Slim Surface
Mount Track
14mm-2Mtr. Without Strip
Size: 14mmx2m



CAT NO.: OMM-105
Back light Recessed Mount Track
1Mtr. Without Strip
Size: 33mmx30.5mmx1m



CAT NO.: OMM-106
Back light Recessed Mount Track
2Mtr. Without Strip
Size: 33mmx30.5mmx2m



CAT NO.: OMM-107
Back light Recessed Mount Track
1Mtr. Without Strip
(Plaster on Board)
Size: 49mmx28mmx1m



CAT NO.: OMM-108
Back light Recessed Mount Track
2Mtr. Without Strip
(Plaster on Board)
Size: 49mmx28mmx2m

DRIVERS & ACCESSORIES




CAT NO.: OMM-124
100W Driver | 48V Driver




CAT NO.: OMM-125
200W Driver | 48V Driver




CAT NO.: OMM-126
5mm I Joint Connector Surface
Direct Joint-for slim Surface mount track



CAT NO.: OMM-127
5mm L Joint Connector Surface
L Joint-for slim Surface mount track



CAT NO.: OMM-128
5mm I Joint Connector Surface
T Joint-for slim Surface mount track



CAT NO.: OMM-129
5mm Cross Joint Connector Surface
Cross Joint for slim Surface mount track



CAT NO.: OMM-130
14mm Back light Super Slim I Connector
Direct Joint for Back light Surface track



CAT NO.: OMM-131
14mm Back light Super Slim L Connector
L type Joint for Back light Surface track



CAT NO.: OMM-132
14mm Back light Super Slim T Connector
T type Joint for Back light Surface track




CAT NO.: OMM-133
14mm Back light Super Slim
Cross Connector | Cross Joint for Back
light Surface track



CAT NO.: OMM-134
Recessed Mount Track L Connector
vertical. I Type Joint for Recessed Track



CAT NO.: OMM-135
Recessed Mount Track L Connector
vertical | L Type Joint for Recessed
Track (Plaster On Board)

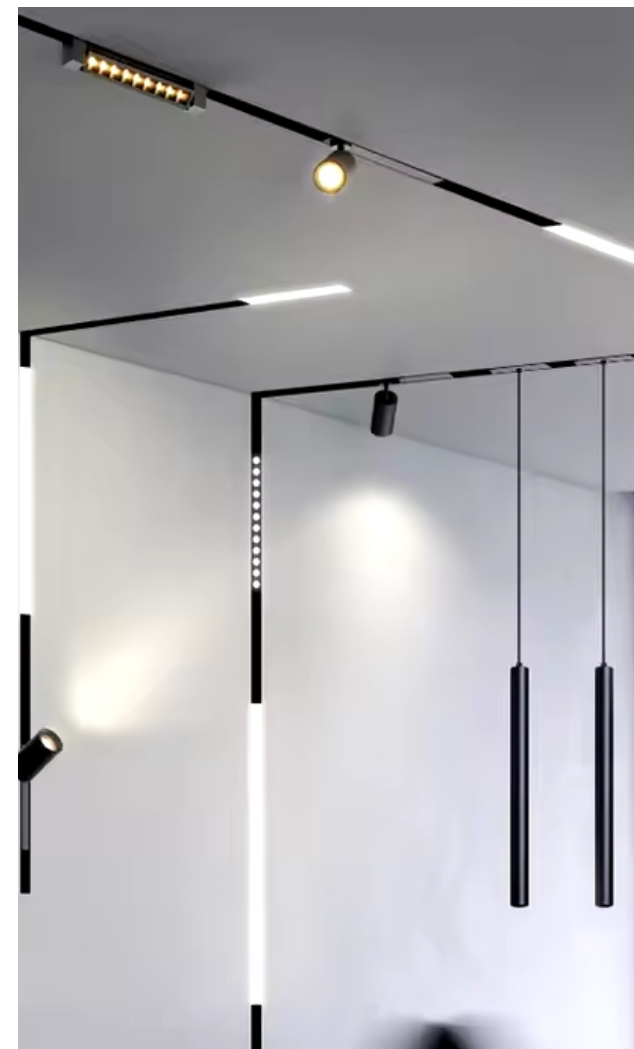

DRIVERS & ACCESSORIES



CAT NO.: OMM-136
Recessed Mount Track L Connector
Horizontal . L Type Joint for Back light
Recessed Track



CAT NO.: OMM-137
Recessed Mount Track L Connector
Horizontal (Plaster on Board)
. L Type Joint for Back light
Recessed Track (Plaster on Board)



CAT NO.: OMM-138
External Power Connector 2Pin
External Power connector
of Recessed Track



CAT NO.: OMM-139
L Connector 2 Pin
Two end Power connector
of Recessed Track



CAT NO.: OMM-140 | Frame Patti
Track Fasting Piece for
recessed track



CAT NO.: OMM-141
Rail 1 MTR Diffuser



CAT NO.: OMM-190
100W 24V Smart Driver




CAT NO.: OMM-191
200W 24V Smart Driver




CAT NO.: OMM-142
Rail 2 MTR Diffuser



CAT NO.: OMM-192
Smart Remote

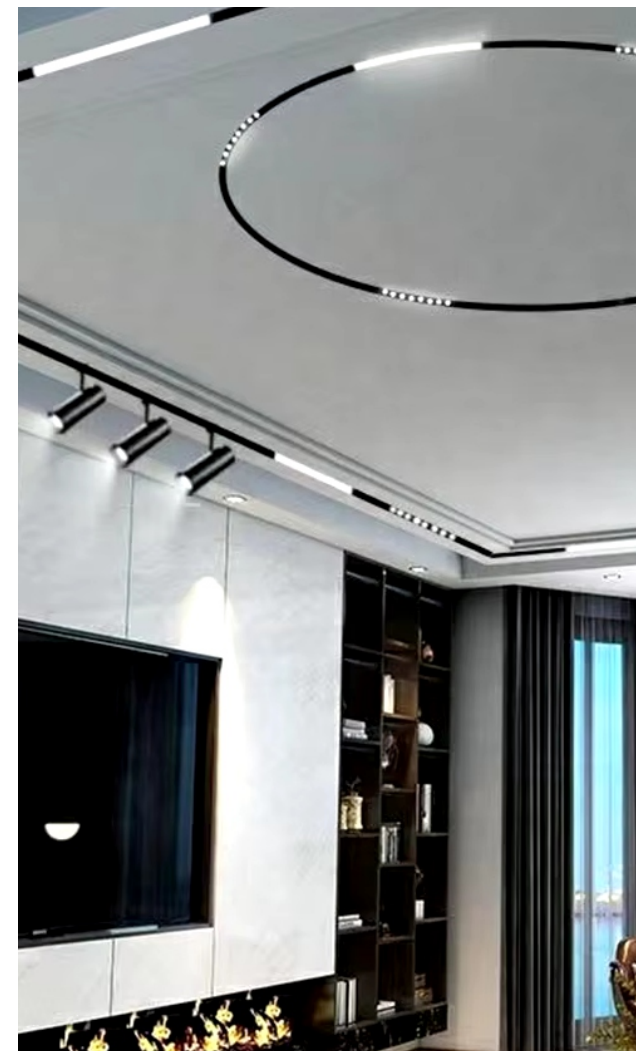

LED MAGNATIC LIGHT APPLICATION

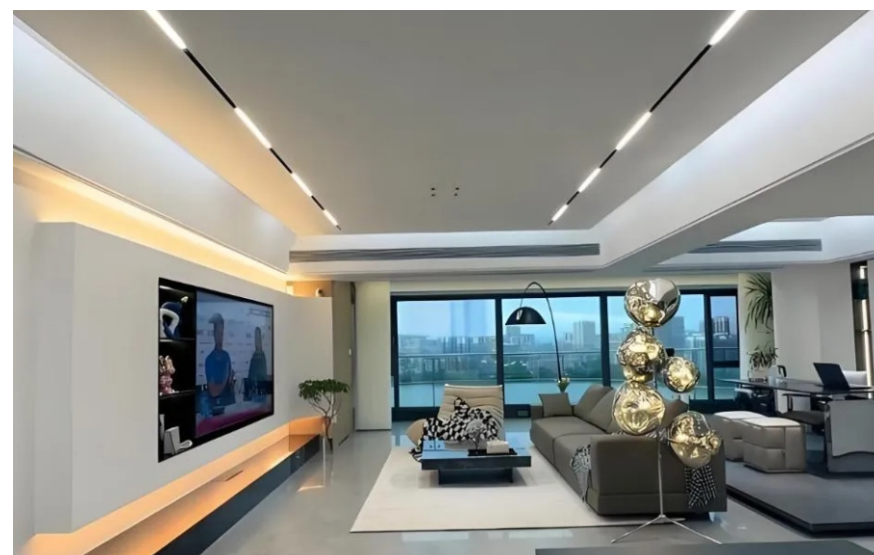

AN AURA OF EXCLUSIVITY



Contact Us



Regd. Address: New Delhi

K-11, Udyog Nagar Industrial Area, Peera Garhi
Near Peera Garhi Metro Station, Rohtak Road
New Delhi-110041

Find Us  

E-mail: info@orloindia.com || Website : www.orloindia.com

Toll Free Number: 1800 103 4199

LED MAGNETIC TRACK LIGHTS



One Second installation

Anywhere in the track, various products can be placed, such as spot light, linear light and pendant lights